



● **Operational Conditions:**

Temperature: -20°C to +120°C

Pressure: ≤ 0.6MPa

Speed: ≤ 10m/s

● **Applications: Clean water.**

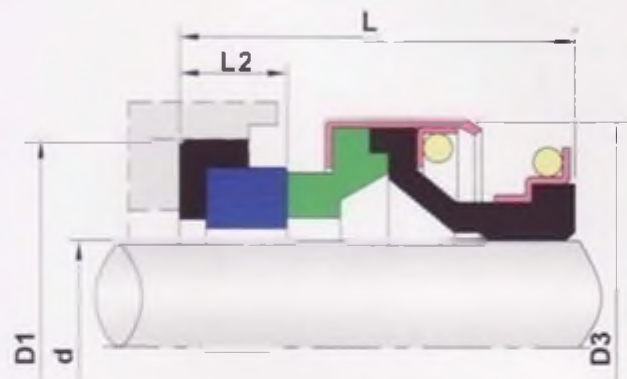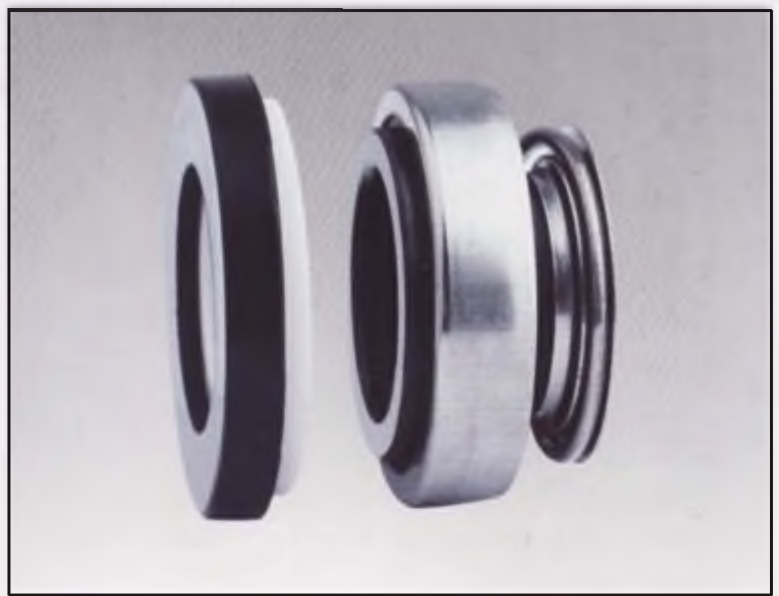

Metric sizes	d	D3	D1	L	L2
10	10	24.0	26.0	21.0	8.0
11	11	24.0	26.0	21.0	8.0
12	12	24.0	26.0	21.0	5.5
12	12	24.0	26.0	21.0	8.0
13	13	24.0	26.0	21.0	5.5
13	13	24.0	26.0	21.0	8.0
13L	13	28.0	28.0	21.0	8.0
13H	13	32.0	29.5	30.5	8.0
14	14	28.0	28.5	21.0	8.0
14L	14	32.0	29.5	21.0	8.0
15	15	28.0	28.5	21.0	8.0
15M	15	32.0	30/29.5	21.0	8.0
15L	15	39.0	38.0	21.0	8.0
16	16	28.0	29.5	21.0	8.0
16M	16	32.0	29.5	21.0	8.0
16L	16	39.0	38.0	21.0	8.0
16H	16	32.0	30.0	21.0	10.0
17	17	39.0	42.0	21.0	8.0
18	18	39.0	42.0	21.0	8.0

Metric sizes	d	D3	D1	L	L2
19	19	39.0	42.0	21.0	8.0
20	20	39.0	42.0	21.0	8.0
20L	20	42.0	45.0	23.0	10.0
22S	22	36.0	45.0	26.5	10.0
22	22	42.0	45.0	23.0	10.0
23	23	47.0	50.0	23.5	10.0
24	24	47.0	50.0	23.5	10.0
25	25	47.0	50.0	23.5	10.0
26	26	47.0	50.0	23.5	10.0
27	27	47.0	50.0	23.5	10.0
28	28	54.0	57.0	25.0	10.0
30	30	54.0	57.0	25.0	10.0
32	32	54.0	57.0	25.0	10.0
35	35	60.0	63.0	26.0	10.0
38	38	65.0	68.0	30.0	12.0
40	40	65.0	68.0	30.0	12.0
45	45	70.0	73.0	32.0	12.0
50	50	85.0	88.0	38.0	15.0
55	55	85.0	88.0	38.0	15.0
60	60	105.0	110.0	45.0	15.0