


Mechanická ucpávka R91



- průměry do 100mm
- tlak max. do 12 bar
- obvodová rychlost max.15m/sek
- teplota -20°C až + 120°C

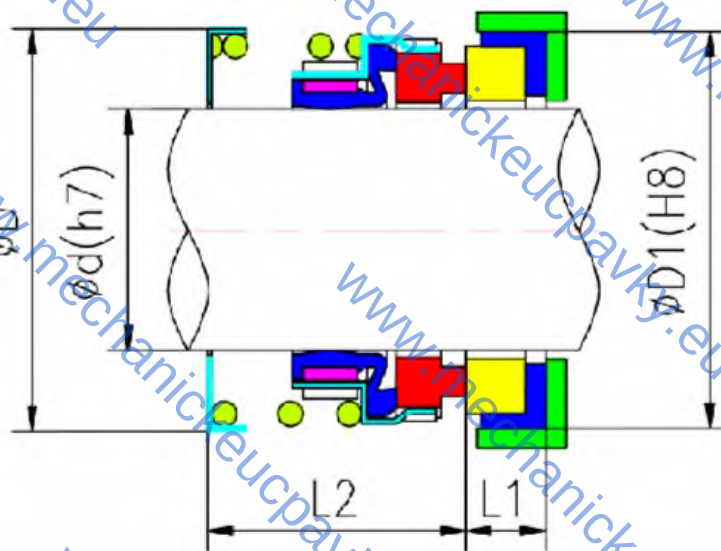

	d	D	D1	L1	L2
R91-14	14	27.5	30	5	18.7
R91-16	16	28.5	32	5	21
R91-18	18	31.2	35	7.5	22.5
R91-20	20	31.7	35	8	21
R91-24	24	40.2	39	8	25.5
R91-25	25	40.2	40	8	25.5
R91-28	28	44.1	43	8	25.5
R91-30	30	45.1	45	9	25.5
R91-32	32	49	48	9	33.5
R91-33	33	49.9	48	9	33.5
R91-35	35	50.2	50	9	33.5
R91-38	38	55.3	56	9	33.5
R91-40	40	57	58	9	33.5
R91-43	43	60.7	61	9.5	36.5
R91-45	45	62.5	63	9.5	38
R91-48	48	66.5	66	9.5	38
R91-50	50	68.6	70	9.5	38
R91-53	53	70.8	73	9.5	41
R91-55	55	72.4	75	9.5	41
R91-58	58	80	78	9.5	42
R91-60	60	83	80	9.5	42
R91-65	65	87.2	85	9.5	43
R91-70	70	91.6	92	11	45
R91-75	75	99.4	97	12	48
R91-80	80	104.6	104	12	55
R91-85	85	111	109	12	64.2
R91-90	90	113	114	12	66.2